

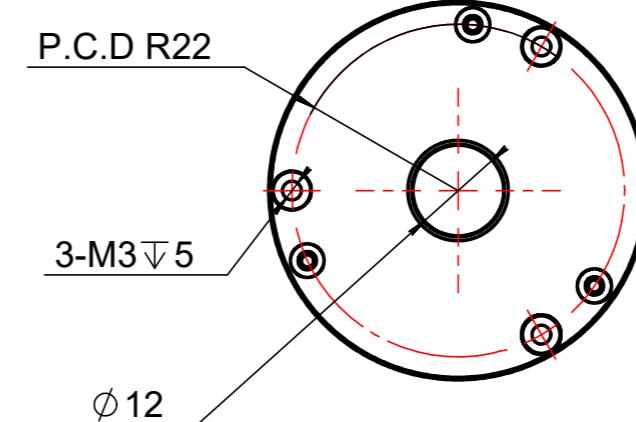
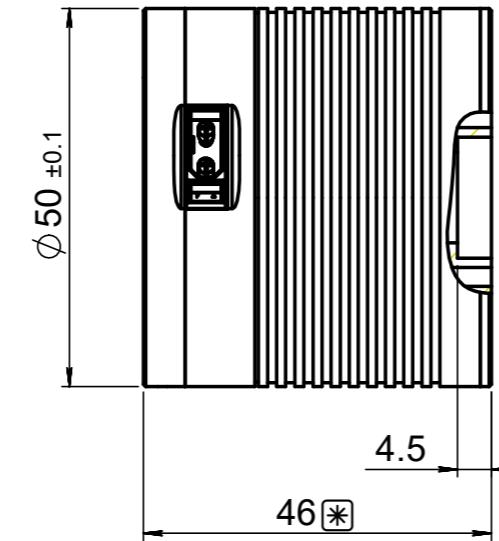
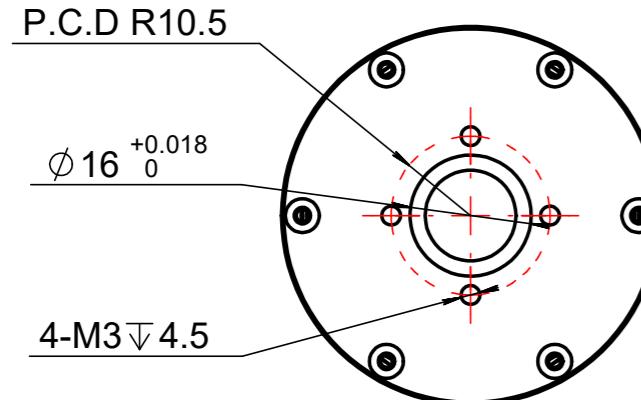
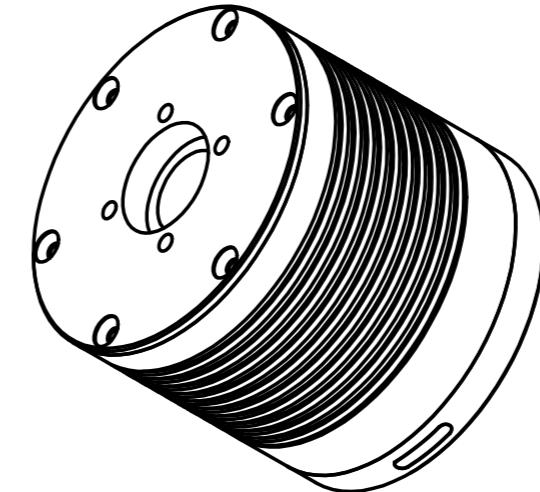


1 2 3 4 5 6 7 8

A

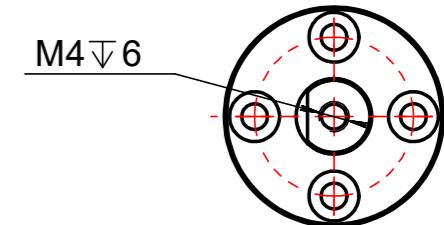

选配件:

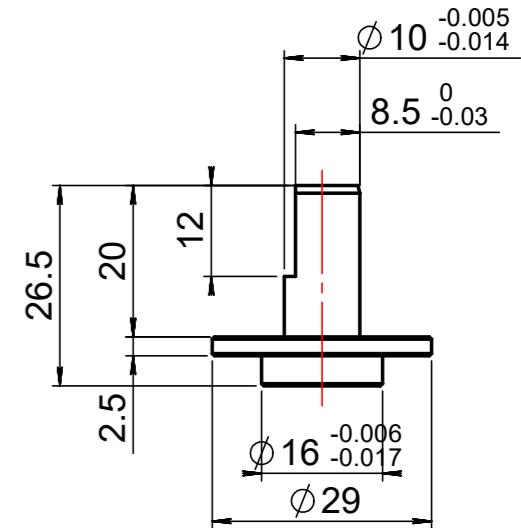

输入电压(V)	24	效率(%)	>83%
空载转速(RPM)	3000	反电势常数(Vdc/Krpm)	7.93
空载电流(A)	0.36	扭矩常数(N.m/A)	0.07
额定转速(RPM)	2500	线电阻(Ω)	0.4
额定转矩(N.m)	0.35	线电感(mH)	0.19
额定功率(W)	91.6	极对数	13
额定电流(A)	4.9	齿槽转矩(mN.m)	12
峰值扭矩(N.m)	0.87	接线方式	Y
峰值电流(A)	14.7	轴向负载(N)	489

0 mm 10 20 30 40 50 60 70 80 90 100

50 60 70 80 90 100

60 70 80 90 100

名称 TITLE
电机组合图


Professional · Reliable · Innovative

尺寸参考图

版本 REV 比例 SCALE 帧面 FORMAT 分页号 PAGE
Sheet 1
Of 1
图号 PRO NAME MT-H5015
第一视角 FIRST ANGLE JTM

设计 DESIGN 工艺 PROCESS
核对 CHECK 日期 DATE

产品名称 PRO NAME
PRO NAME

1

2

3

4

5

6

7

A3